


30SCH 11304 USH 27





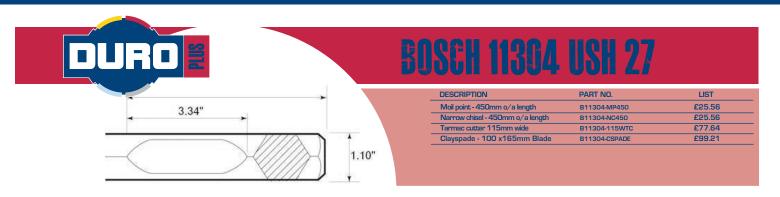

Drop forged from high grade steel, this Hammer Iron with heat treated work areas is used for demolition work and starting holes in the centre of a concrete slab. The most common of the demolition steels used for general breaking where there is not a requirement to control the line of fracture.

115MM WIDE TARMAG CUTTER



Tarmac Cutter used for cutting of coated stone. The wedge shape of the side profile is preferred by many operators as it facilitates easy removal of the blade after each cut.

AN EXTENSIVE RANGE OF BREAKERS AVAILABLE FROM OUR SISTER COMPANY YOKOTA UK

NARROW CHISEL



Narrow chisel used in a similar way to the moil point but the line of fracture is controlled along the line of the chisel end. Used on applications where it is important to have a clean edge retained on the workpiece to be broken.

CLAYSPADE






Clayspade is a purpose designed blade for cutting / digging of boulder clay. The geometry facilitates the cutting action to return to an open face. If the edge is damaged during use it will destroy the natural scooping action. This tool is favoured by tunnelling contractors and companies specialising in underpinning in clay conditions.

Also excellent for general garden and landscaping.

HOW TO SELECT YOUR DURO BREAKER STEEL

- Choose the kind of application you need to undertake and therefore the breaker steel type you need to achieve.
- 2. Then select the machine type you will be using pneumatic or electric

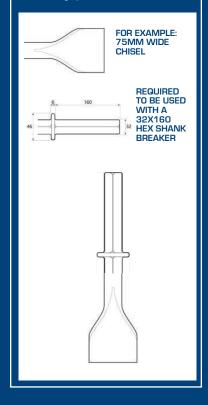

THE PRO-LINE FROM DURO, OFFERING PROFESSIONAL LEVEL TOOLS AT VERY COMPETITIVE PRICE LEVELS. THIS RANGE IS RENOWNED FOR OFFERING GREAT QUALITY, PERFORMANCE AND VALUE TOOLS WITH VERY HIGH OUTPUT.

